

6426 Summer Gale Dr. Memphis, TN 38134 fax: 888-977-2846| support@royalswimmingpools.com

# INGROUND LINER MEASURING FORM

### TIPS FOR MAKING MEASURING YOUR POOL EASIER AND MOST ACCURATE!





Keep a copy of the measurements when you're done



Measure in feet & inches, rounding up to the nearest 1/4 inch

- IF YOU HAVE A PREVIOUS POOL LAYOUT OR DIG SPEC: Ignore it. Actual measurements of the pool have to be made even if original pool plans are available due to the fact that variances often occur during construction.
- Supply all measurements in feet & inches, rounding measurements up to the nearest 1/4 inch.
- Always measure from the floor to the <u>bead receiver</u>. Do not measure to the coping/top of the deck.
- Write legibly, using Black Ink only (No pencil or felt-tip marker). If we cannot read it or if your (6)s look like (0)s, costly errors can be made and liners are non-refundable.
- Make copies of everything! If we have questions regarding your measurement, you will need to be able to reference the material in question.
- Don't leave information out! It can delay your quote and order as well as affect the liner ordered.
- If you get stuck along the way, reach out to us at any time! We're here to help!

Your Name	After completion, submit this
Shipping Address	form either by email or fax:
City, State, & Zip Code	EMAIL: <u>support@royalswimmingpools.com</u>
Phone Number	FAX:
Email Address	1-888-977-2846
Today's Date	

Agreement between Royal Swimming Pools and the above named customer: Vinyl Liners are NOT refundable and cannot be returned. Customer assumes responsibility for ALL liner specifications.

Customer's Signature

Date

## FILL IN THE BELOW STEPS ACCURATELY AND CLEARLY

#### STEP 1: NEW LINER STEP 3: CORNER MEASUREMENTS **PATTERN & THICKNESS** Measurement from point 1 to point 2: PATTERN: Inches MIL: All corners are the same measurements STEP 2: NEW LINER TYPE If corners do not have the same Standard Bead measurements, please use the diagram below Pool Deck Low Hung Bead to indicate each corner's measurement. Overlap Beaded Other-S2 S1 Extra Inches Low Hung Beaded DEEP SHALLOW needed for Overlap END Reverse Bead Standard Bead **S4** S3 Receiver is on the bottom on the top Inches S<sub>2</sub> Inches S1 Liner Pool Wall -S<sub>3</sub> Inches S4 Inches STEP 4: INDICATE YOUR HOPPER PAD TYPE **CONTOUR HOPPER SQUARE HOPPER** --P ---\*Note if CD for the additional corners are different **ADDITIONAL CONTOUR: MEASUREMENTS:** U Inches CD nches Inches S Inches Inches Ν Α

B


Inches

Т

Inches

Inches

Р

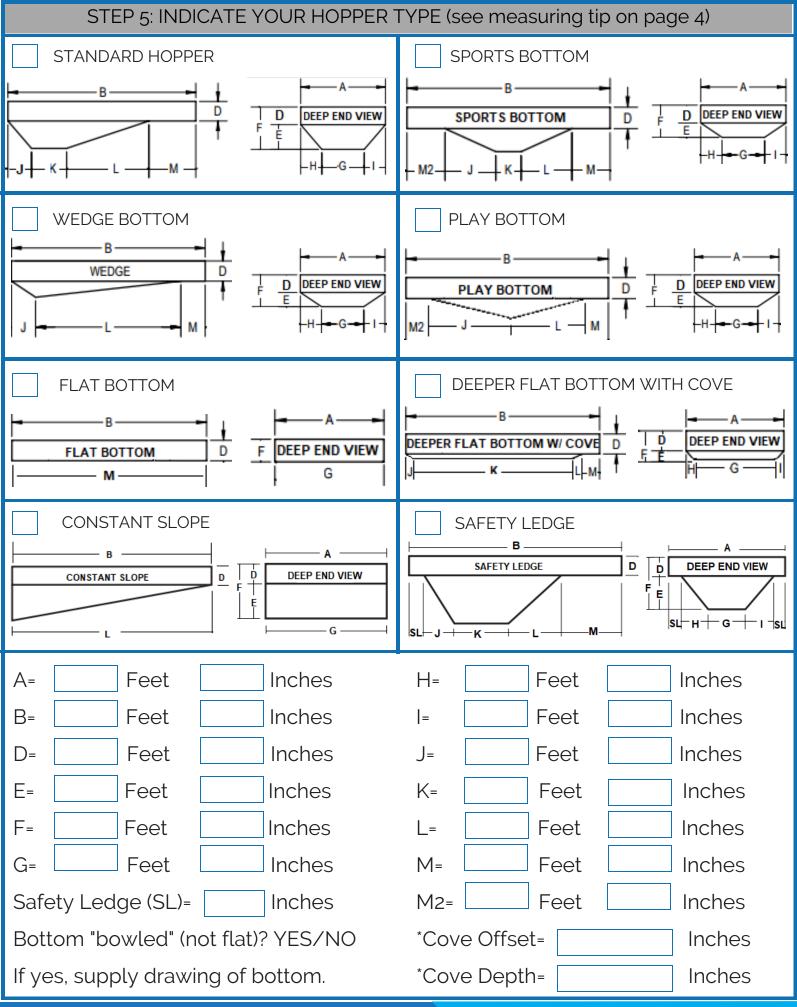

# STEP 6: FINAL CHECKS

1. DO YOU HAVE VINYL OVER STEPS? YES NO

If Yes, please submit additional vinyl over step measurement form as well,

#### 2. REQUIRED CHECKS

A is the total width of the pool and B is the total length from measurements taken in step 4.

- D + E must equal F (required for all Grecian pools)
- CD+U+CD must equal B (required for all Grecian pools)
- CD+T+CD must equal A (required for all Grecian pools)

The below measurements are required based on your <u>HOPPER TYPE:</u>

- J + K + L + M must equal B for Standard Hopper.
- J + K + L + M + SL must equal B for a Safety Ledge.
- H + G + I must equal A (without a safety ledge)
- SL + H + G + I + SL must equal A for Safety Ledge.

### 3. MEASURING THE SHALLOW END COVE:


(if applicable; not common)

The COVE OFFSET is how far the cove comes out into the pool.

The COVE DEPTH is the distance between the pool floor and the top of the cove where the cove meets the wall.

DO NOT measure on an angle! See tip below.

Enter measurements on page 3.



# \*MEASURING TIP\*

BE SURE TO TAKE ALL MEASUREMENTS HORIZONTALLY!

If your quick checks above are off this may be why! See the image to the right for correct and incorrect measuring examples!

